

RNI MAHMAR

36829-2010

ISSN- 2229-4929

Peer Reviewed

Akshar Wangmay

International Research Journal

UGC-CARE LISTED

Special Issue-V, Volume-I

Current Scenario in Languages, Social Sciences, and its
Impact on Social Development

March 2022

Chief Editor:

Dr. Nanasahab Suryawanshi

Executive Editor:

Prof. Dr. D. S. Tikate

Principal

Deshbhakta Sambhajirao Garad

Mahavidyalaya, Mohol (Solapur),

Address

'Pranav', Rukmenagar,
Thodga Road, Ahmadpur, Dist- Latur 413515 (MS)

AKSHAR WANGMAY

International Peer Reviewed Journal
UGC CARE LISTED JOURNAL

March- 2022

Special Issue-V, Volume-I

On

***Current Scenario in Languages, Social Sciences, and its
Impact on Social Development***

Chief Editor

Dr. Nanasaheb Suryawanshi

Pratik Prakashan, 'Pranav, Rukmenagar, Thodga Road Ahmedpur,
Dist. Latur, -433515, Maharashtra

Executive Editor

Prof. Dr. D. S. Tikate

Principal

Deshbhakta Sambhajirao Garad Mahavidyalaya, Mohol (Solapur), Maharashtra

Co-Editor

Prof. Dr. S. M. Mulani

Prof. Dr. N. J. Patil

Dr. D. G. Shinde

Shri. A. B. Banate

Dr. V. R. Pawar

Published by- Pratik Prakashan

***The Editors shall not be responsible for originality and thought expressed in the papers. The author shall be
solely held responsible for the originality and thoughts expressed in their papers.***

© All rights reserved with the Editors Price:Rs.1000/-

CONTENTS

Sr. No.	Paper Title	Page No.
1.	The Study Of Status Of Workers In The Sagereshwar Sahkari Soot Girni Ltd.(Kadegaon)	
2	A Study of Bank Accounts Holders of Female Population in Scheduled Commercial Banks in India Mr. S.A. Gaikwad, Dr.B.S.Jadhav	1-4
3	Impact of Climate Change on Agriculture in Western Satara District - An Analysis Of Farmer Awareness And Knowledge Prin. Dr. Pratibha S. Gaikwad	5-7
4	Comparative Study of Scheduled Casts and Scheduled Tribes Sex-Ratio in India & Maharashtra (1961 to 2011) Dr. Pravin Ramchandra Jadhav, Dr. Hanumant Sadashiv Sanap, Dr. Basavaraj Machhindra Mali	8-10
5	Food and Drink in the Short Stories of R. K. Narayan's Malgudi Days. Dr. Sunil Ambrushi Gond	11-14
6	Impact of Agricultural Development on Natural Vegetation In Shirala Tahsil: A Geographical Study Dr. Arjun Mashal, Mr. Thorat Tanaji Bharat	15-17
7	Ecological Sustenance and Rewilding: A Dystopian Reading of H.G. Wells The Time Machine Dr. U. N. Suryawanshi	18-23
8	Dalit Women's Labor: Issues of Caste, Gender, Dignity and Human Rights Mr. Georgin M.T.	24-26
9	Hierarchical Distribution of Health Care System in Satara District: A Geographical Analysis Mr. Mane Sanjay Rajaram, Dr. Yadav Prashant Patangrao	27-29
10	A study of various leadership styles among B. Ed Teacher trainees of B. Ed colleges in Mumbai region. Mr. Santosh Prakash Patil	30-33
11	Area And Production Of Sugarcane Crop In Maharashtra With Special Reference To Satara District Mr. Ramshankar Varma	34-36
12	An Analytical Study of The 'National Green Tribunal Act 2010' In Upholding Environmental Sustainability. Mrs. Nilam Shankar Desai, Dr. H. Y. Karande	37-41
13	Critical Review Of Relationship Between Income Inequality And Healthy Environment Dr. Umesh S. Aswar	42-44
14	Study of Thane Creek Pollution Caused By Various Sources Of Pollution Nitin D. Ade	45-48
15	Current Challenges Facing Indian Democracy: Some Solutions Dr. Suresh J. Phule, Gosavi Nandkumar Manohar	49-51
16	The Performance of Digitalization in The Indian Banking System in 2021 Nandkishor Nanasaheb Ugale	52-53
17	The Impact of Information Technology on Modern Accounting System Mr. Rupesh Anil Kumbharkar, Dr. Bhagawan Shankar Salunkhe	54-57
18	Human Rights of Senior Citizens: A Social Perspective Mr. Gunge Balasaheb Ananda	58-60
19	Spatio-temporal Change detection in Beach Morphology: a Case Study of 'Devbag-Karli Recurve-Beach-Spit' along South Konkan of Maharashtra Dr. Vasant K. More	61-63
20	Gis-Based Spatio-Temporal Rainfall Variability – A special Emphasis On The Indo-Gangetic Plains, India Dr. D. H. Pawar, Sapana B. Lavate	64-68
21	Delineation of Crop Combination Region In Man River Basin Jueeli Raut, Dr. H. N. Singh, Dr. H. N. Rede, Dr. M. V. Suryawanshi	69-74
22	Gandhian Philosophy And Promotion Of Human Rights In India Dr. B.M.Mali, Dr. A.A. Phate	75-77
23	Evaluation of the Social movement in post-independence India Dr. Milind Shivaji Desai	78-80
24	A Study Of Agricultural Wages In India Dr. Bhimashankar Madhusudan Dahalake	81-82
	Dr. S. G. Gavade,	83-88

25	An Study On The Effectiveness Of Bicycle Utilization On Explosiveness Power Of Secondary School Students	Praveena A, Dr. Appanna M Gasti	89-92
26	Trade Secrets – Unrecognized Aspect of Intellectual Property Rights	Shreepriya Thakkar, Ruchi Tiwari	93-96
27	Employee Empowerment: A Research Review	Kevale Malati Ashok, Prof. Dr. V. S. Dhekale	97-100
28	During the Covid-19 period lockdown reduced environmental problems	Dr. Ankush Sahebrao Dake	101-102
29	Punishment, Forgiveness and Divine Justice in Shashi Tharoor's Short story -The Temple Thief	Savita Sadanand Jadhav	103-104
30	Geographical Study of Land Subdivision In Rural Settlements In Kinwat Tehsil Of Nanded District.	Dr. Prakash Kashinathrao Morkhande	105-107
31	A Study of Challenges of Distribution Expansion of Parle FMCG Products in SMK Corporation	Dr. Avadhut Bhaupatil Nawale	108-110
32	A Scope Of Alternative Dispute Resolution Methods In Matrimonial Disputes	Kiranben G Solanki	111-115
33	A Study on Destructive Favouritism and Related Deviated Practices In The Schools Affecting Quality Education	Robit Mathew, Dr. Jagannath K. Dange	116-119
34	Tehsil wise Rural Density of Sc Population in South Konkan of Maharashtra	Shri. Abhijeet A. Dhulgude, Dr. Meena B. Potdar	120-122
35	Geographical Study Of Demographic Characteristics Of Dange Tribal In-Migrants In Kolhapur City (Maharashtra)	Dr. Ashish S. Jadhav	123-127
36	Water Estimation of the Indapur Tahsil	Gajanan Dhobale	128-135
37	Levels of Agricultural Development in Satara District	Mr. R. S. Chaure, Dr. H. Y. Karande	136-138
38	An Overview of Agricultural Sustainability In Satara District Of Maharashtra Using Indexing Approach.	Digvijay R. Patil	139-146
39	A Study on Problems Of Scheduled Caste Entrepreneurs In Kolhapur City	Mr. Rahul Uttam Bansode, Miss.Archana Tanaji Dabholakar	147-155
40	'The Spice Of Life In Conflict'— A Peregrination Tracing Life's Conundrum and The Repercussion Of The Scars Of Childhood In Adult Relationship as Seen in Toni Morrison's Jazz	Dr. S. Jenefa Kiruba Malar	156-158
41	Empowerment of Transgender Community and Government Policies	Ms. Vidya Vasant Bhosale, Dr. Manohar Vaswani	159-161
42	Mapping and Assessment of Changing Vegetation Cover in Pune Division (Maharashtra)	Ms. Gayatri Aniket Pawar.	162-165
43	Gloria Naylor's The Men of Brewster Place: A Stereoscopic Analysis of 'His'story	Dr.K.Valli	166-168
44	Spatio-Temporal Assessment of Rainfall Variation in Nanded District	Akash P. Shewane, Kishor B. Shinde, Dr. Parag A. Khadke	169-172
45	Socialist Transformation of Agriculture In China: A Model For Equal Distribution Of Agriculture Land	Lt. Dr.Rajshekhar K. Nillolu	173-175
46	Modern water Conservation Methods	Dr. Sandeep R. Pathrikar	176-179
47	Impact of COVID 19 on Agricultural Women Laborers' In Ambajogai	Dr. Rama Achyut Pande	180-181
48	Multiculturalism: A New Dimension In Zadie Smith's Novel 'White Teeth'.	Miss. Bhagyashri Narayan Shelake	182-183
49	A Comparative Analysis of service Areas of Agro Service Centers in Chopda tahsil	Dr. Ramesh V. Bhole	184-186
50	Spatio-Temporal Study of Agricultural Development in Satara District	Dr. Sudhakar Koli, Dr. Anilkumar Wavare	187-191

Water Estimation of the Indapur Tahsil

Gajanan Dhobale

Assistant Professor, Dept. of Geography, Arts, Science and Commerce College, Indapur, Dist. Pune

Email: gajanandhobale42@gmail.com

Abstract

A water estimate commonly provides the info of quantity and place of it. Water estimate studies consider the volumes of water within the various reservoirs of the hydrologic cycle and the flow paths from recharge to discharge. The reservoirs of surface and underground water are about 1542.695 MCM; Out of this only 601.38 MCM water is required for use. Water estimate are developed by measuring or estimating the inputs and outputs of a hydrologic system. Inputs are the processes that add water to the system; these include precipitation and inflow from surface water and groundwater. Outputs are the processes that remove water from the system; these include evapotranspiration, the various uses of water by humans, and outflow from surface water and groundwater. General hydrological equation to compute water balance and runoff has been estimated. The average surface water village wise runoff of the study area is estimated. There is great deal of variations in terms of volume of runoff by different villages. The entire tahsil is drought prone and faces the problem of water scarcity throughout the year. Observing these outcomes in the present context, this paper calculates the water budget of the Indapur tahsil. The outcomes of these studies are briefly presented in this paper. It has been observed that the water resources are not uniformly available in the study area.

Key words: Precipitation, evapotranspiration, runoff, surface water, groundwater water balance, water estimation.

Introduction

A water estimate is a basic tool that can be used to evaluate the occurrence and movement of water through the natural environment. Water estimate provide a foundation for evaluating its use in relationship to other important influencing conditions such as other ecological systems and features, as well as social and economic components – how much water is being used by agriculture, industry and residents etc. The water estimate process can encompass various levels of assessment which start simple and grow more complex if there are concerns about how much water is available at any level. Water estimate commonly provides the info of quantity and place of it. Water estimate studies consider the volumes of water within the various reservoirs of the hydrologic cycle and the flow paths from recharge to discharge. Water budgets need to consider this information on a variety of spatial and temporal scales (Hazel Breton 2010). The maximum water holding capacity of soils, rainfall and potential evapotranspiration are the basic controlling elements of water balance. The distribution of these elements decides droughts or water surplus condition. Therefore rainfall, potential evapotranspiration, aridity, humidity and soil moisture are become primary controlling factors of agriculture (Saikia 1994). In the present study water balance technique is used to estimate the availability of rainwater resource in the study area. The nature and distribution of rainfall of the study area discussed earlier indicates that about 90 percent rainfall takes place during the short period of four months from June to September. There is a great variation in the number of rainy days.

Objectives

1. To identify inputs and outputs of a hydrologic system
2. To identify place and quantity of water.
3. To calculate the runoff of the study area.
4. To make favourable suggestions to low runoff and sufficient water available.

Study area

Indapur tahsil is one of the tahsils in the Pune district consisting of 142 villages along with one urban centre in the study area. There are eight revenue circles in the tahsil. The area extends from 17° 53' 42" to 18° 19' 58" North latitudes and 74° 39' 16" to 75° 09' 39" East longitudes (Fig. 1). The area is drained by the river Bhima on north and east both sides. Nira River flows south of Indapur tahsil. Total geographical area of the tahsil is 1575.38km² (Census 2011), out of which Nira river catchment area compress about 586.8 km² and Bhima river catchment covers an area of 902.43km². Nira River joins the Bhima River at famous tourist place i.e. Narsinhapur village after travelling a course of 209 Kms from origin. The slope of region is towards east. There are three soil types, namely, coarse shallow, medium black and deep black soils occupying 30, 40 and 30 percent respectively.

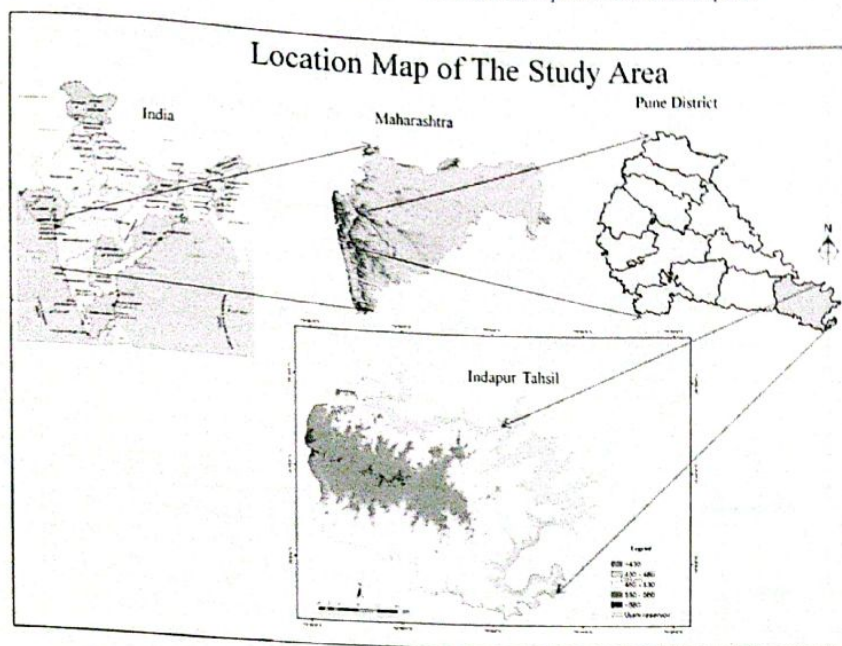


Fig. 1 Location map

Database and methodology

For the present research work secondary data source are used. This work is to develop digital database at large scale using spatial and attribute data. The spatial data comprise of all the thematic and topographic maps and the attribute or non-spatial data is created mainly water details utilities information etc. All the supported data is collected from survey of India, Maharashtra State Gazetteer Pune District, Maharashtra Governments department of irrigation, department of agriculture, department of water conservation. General hydrological equation to compute Water balance used is $P = Q + E + \Delta S$. The Dickens, Inglis and Nawab Ali Jung Bahadur formula was used to estimate the runoff. These data base converted to Microsoft access format to suit to the link up for processing through Arc View 9.3, Surfer version 10, Global Mapper version 11.

Present water Inputs and Outputs of the study area


Water budgets are developed by measuring or estimating the inputs and outputs of a hydrologic system. Inputs are the processes that add water to the system; these include precipitation and inflow from surface water and groundwater. Outputs are the processes that remove water from the system; these include evapotranspiration, the various uses of water by humans, and outflow from surface water and groundwater. It is also observed that the critical examination of ground water recharge potential of the study area reveals that infiltration is negligible and hence not considered in the present computation of water budget. The components of a water budget are illustrated in Table no. 1. Many inputs and outputs can be measured directly or estimated using various techniques.

Table no. 1 The components of a water budget

Sr. No.	Inputs	Water in MCM	Outputs	Water in MCM
1	Rainfall	1052.468	Runoff	327.716
2	Canal and Reservoir	214.587	Actual evapotranspiration	771.212
3	Recharging of groundwater	275.64	Infiltration	*
	Total	1542.695		1098.918

Source: Tahsil office and agriculture office Indapur, Irrigation offices, Baramati and Daund, GSDA office, Pune, 2018.

* Being too low ground water recharge potential Infiltration has not been considered in the present component. Ref. Fig. 2.

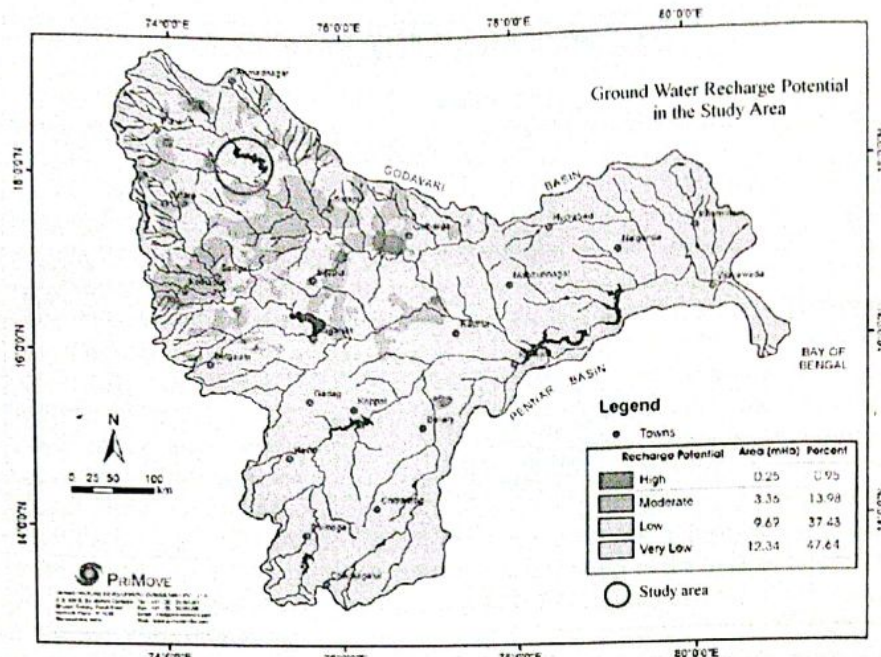

Source: National rain fed area authority planning commission New Delhi 2011

Fig. 2.

Water budget estimation using hydrological equation

General hydrological equation to compute Water balance used is

$$P = Q + E + \Delta S$$

Where,

P is precipitation,

Q is runoff,

E is evapotranspiration and ΔS is the change in storage in soil or the bedrock.

Inputs

1. Rainfall

One of the fact that need to be emphasized here, is that the mean annual rainfall of the eight stations in the study area is above 362 mm for all of the stations receive more or less same rainfall throughout the year. The lowest rainfall in the study area, during the last 15 years period of time, the minimum value was around 128.12 mm in the year 2003 and maximum value was 817.99 mm in the year 2009 with this rainfall the volume of rainfall that is received is 188.06 MCM and 1200.73 MCM, respectively.

2. Canal and reservoir

The Nira left canal and Mutha (Khadakwasala) canal runs through the study area, hence the higher level of contribution to the irrigation. On the basis of the hydraulic data total 93.963 MCM water available from these two canals this is ultimately recharge the groundwater by canal through seepage and increase the level of groundwater. Dam and reservoirs may largely regulate the hydrological regime of a catchment since they temporarily store surface water and hence, reduce storm water runoff downstream of structure. In terms of water budget, overall surface runoff may be significantly reduced due to evaporative losses from the reservoir and abstraction of stored water. Irrigation tank, percolation tank, K. T. Weir etc. near the Ujani dam are the water resources for the area.

3. Recharging of ground water

In the study area the total rechargeable fresh groundwater is computed as 275.64 MCM and the net ground water availability is to the tune of 261.86 MCM. The present gross groundwater draft for all purposes is 221.15MCM. The Stage of groundwater development for the study area, as whole, is 84.45%. This indicates that on an average 84.45% of yearly replenishable groundwater is being used in the study area. Considering the domestic and industrial requirement the allocation of groundwater for next 25 years comes out to be 18.79 MCM. Leaving this allocation, the groundwater available for irrigation in future is around 53.33 MCM. The canals and reservoirs are other main sources of groundwater recharge in the study area.

Outputs

1. Runoff

A. Runoff estimation and computation of its volume

There are several rainfall-runoff models available in the study of hydrological field. In this study, the following empirical formulae have been used and runoff has been estimated by the three methods. Design flood for Indapur tahsil has been worked out by empirical formulae are given below;

1. Dickens formula

$$Q = CA^{3/4}$$

Where Q = flood discharge in cumecs

C = constant depending upon the rainfall depth which may be taken as 13.9 to 19.5 for central India basins

A = catchment area in sq.km.

2. Inglis formula

$$Q = 124A / (A + 10.4)^{0.5}$$

Where Q = flood discharge in cumecs

A = catchment area in sq.km.

3. Nawab Ali Jung Bahadur formula

$$Q = C (0.386A)^{(0.925 - (1/14) \log 0.386A)}$$

Where Q = flood discharge in cumecs

C = coefficient varies from 49 to 60 with maximum value 86

A = catchment area in sq.km.

B. Distribution of surface runoff

Runoff is that portion of rainfall, which enters the stream immediately after the rainfall. It occurs when all losses are satisfied and if rain is still continued, with the rate greater than in-filtration rate, at this stage water starts flowing over the land as overland flow. For the design of any soil and water conservation structures and waterways or channels, runoff volume and peak rate of runoff are required to be estimated. Runoff rate is expressed in cubic meter per seconds and runoff volume or water yield from watershed is generally expressed as m³ Fig. 3a The study area is characterised by undulating terrain land in western part and eastern part is a plain area.

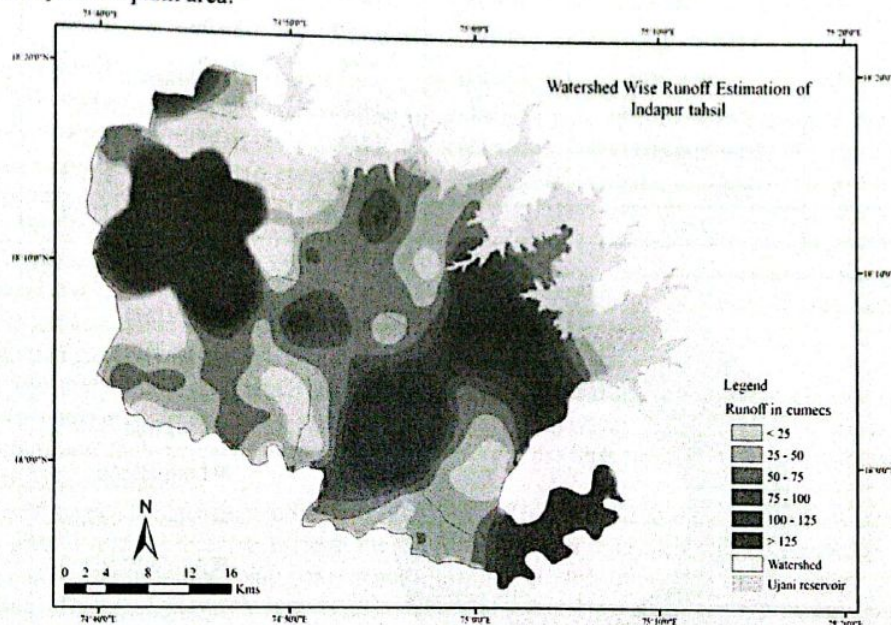


Fig. 3a

In the study area it is observed that the maximum 402.25 km² (25.57 %) area under more than 125 cumecs runoff and 235.51 km² (14.95%) area under less than 25 cumecs. More than 125 cumecs area found western high altitudinal area, eastern side strip between river Bhima and Nira and two patches are found at around Nimgaon Ketki and Indapur settlement. Low runoff (< 25) has found in the Northern area, besides this it found around in patches in the middle and Eastern part of the study area. Besides this 25-50, 50-75, 75-100 and 100-125 cumecs runoff found in patches all over in the study area (Fig 3a & Fig 3b).

Table 2 watershed wise runoff

Sr. No.	Runoff in cumecs	Area		Description
		Km ²	%	
1	< 25	235.51	14.95	Very low
2	25-50	334.86	21.25	Low
3	50-75	357.76	22.71	Medium
4	75-100	149.32	9.48	High
5	100-125	95.08	6.04	Very high
6	> 125	402.25	25.57	
	Total	1575.38	100.00	

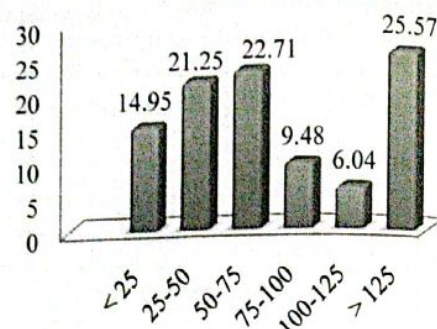


Fig 3b Average surface water runoff (% area)

The average surface water runoff of the catchment is estimated to 327.72 MCM/year (Table 3 & Fig. 4). This is about 31.14% of the total volume of rainfall for the entire study area. There is great deal of variations in terms of volume of runoff by different watersheds. The maximum contribution of runoff in the watershed no. BM67 area that is amounting 46.08% and lowest contribution can obviously be expected from BM61 Bhigwan area which is only 0.37%. From the following table no. 5.2 it becomes clear that, due to variation in rainfall and size of considerable amount of rainfall volume does not get converted in to runoff.

Table 3 and Fig. 4 Watershed wise area and runoff of Indapur tahsil

Sr. No.	Name of Watershed Area	Surface Area in		Runoff in	
		Km ²	%	MCM	in %
1	Bhigwan-BM61	24.53	1.56	1.20	0.37
2	Loni-BM66	194.93	12.37	12.07	3.68
3	Palasdev-BM67	238.97	15.17	150.99	46.08
4	Akole-BM68	125.67	7.98	50.57	15.43
5	Sansar-BM76	337.88	21.45	49.33	15.05
6	Nimgaon-BM77	281.63	17.88	29.98	9.15
7	Indapur-BM78	371.77	23.59	33.57	10.24
	Total	1575.38	100.00	327.71	100.00

Source: Author.


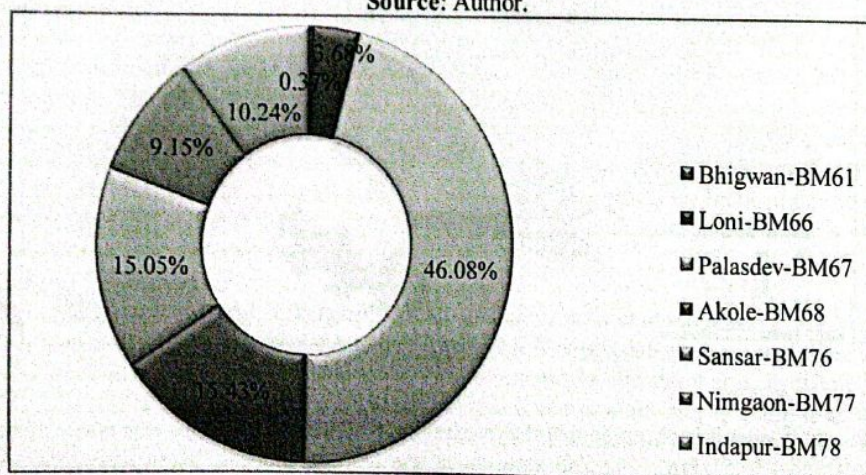


Fig. 4 Variation in watershed wise runoff

2. Actual evapotranspiration

Actual evaporation is a major component in the water balance of a catchment, reservoir or lake, irrigated area. Compared with precipitation and stream flow, the magnitude of actual evaporation over the long term is more difficult to estimate than either precipitation or stream flow. The actual evapotranspiration data obtained from 2006 year has been used for the present study. The spatial distribution pattern of actual evapotranspiration (AE) is shown in the Fig. 5. It has distinct to that of PE to middle portion of the study area.

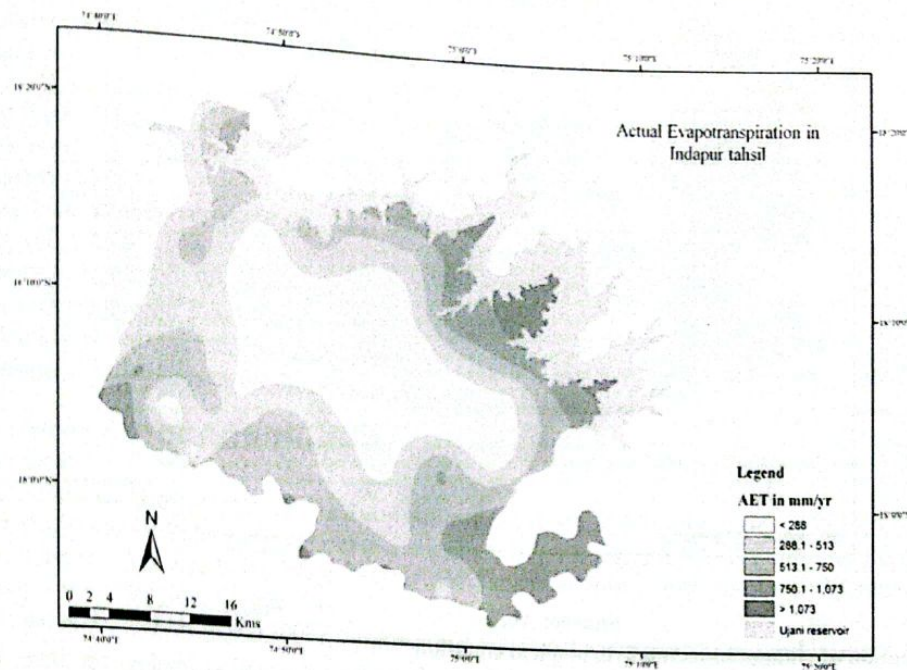

Source: Remote Sensing and Hydrological Modeling of the Upper Bhima Catchment (2006) Fig. 5


The highest value of 1500 mm is at the village Ganjewalan, Ajoti and Kandalgao; where the area experiences very heavy rainfall comparatively rest of the study area and in the area of Ujani dam. An increasing trend towards east has been observed in actual evapotranspiration, this is seen in the case of annual potential evapotranspiration. This is because of the dependence of actual evapotranspiration on rainfall. The lowest values of actual evapotranspiration are over the places Nirgude, Mhasobachiwadi, Lakdi, Vyahali, Kauthali, Karewadi, Nimgaon-ketki, Tarangwadi, Zagadewadi, Gokhali, Vadapuri and Galandwadi No.2, which is already discussed, is the lowest rainfall part of the study area. In this area actual evapotranspiration has been observed between 56 mm to 113mm.

3. Infiltration capacity of the soil

The study area is in the rain shadow and semi-arid climatic condition. In this climatic condition the direct infiltration is relatively ineffective because of the rarity of rainfalls, low mean average precipitation and high potential evaporation. Furthermore, the high potential evaporation compared to precipitation in semi-arid environment results the low deep infiltration of rainwater. The entire tahsil is the basement of Deccan trap basaltic lava. Typically these rocks form the 'Hard rock terrain' and their physical properties such as porosity and permeability play an important role in the movement and accumulation of groundwater. Therefore, in the study area, ground water of acceptable quality and quantity usually lies very low. There are more than 95% area of the study area shows very low ground water recharge, along the Ujani back water and near the confluence of river Bhima and Nira low recharge the ground water. There are only 74.67 km² (4.74%) area recommended for groundwater development in the study area. These are found in the patches in SW and NE part of the study area. Another 1500.71 km² (95.26%) area is notable for groundwater development.

Village wise computation of runoff volume

The average surface water village wise runoff of the study area is estimated to 327.72 MCM/year (Fig. 6), this is about 31.14% of the total volume of rainfall for the entire study area. There is great deal of variations in terms of volume of runoff by different villages. The maximum contribution of runoff in the Akole area that is amounting 79.889 MCM and lowest contribution can obviously be expected from Lamjewadi village that is amounting 0.007MCM.

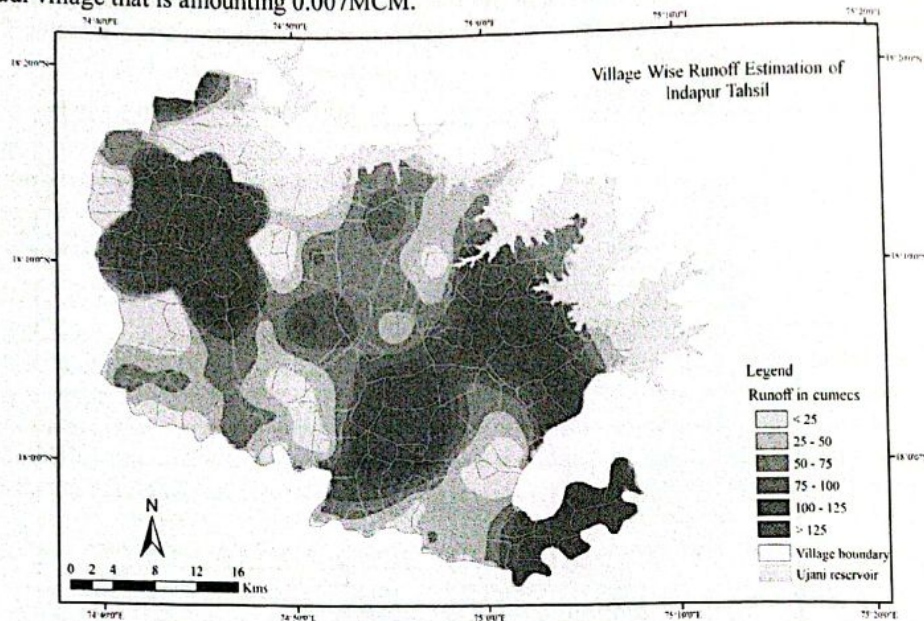

Source: Author

Fig.6

Classification of villages based on hydrological equation

It can be deduced from the figure no. 5.5 that, hydrological equation implied for water budget assessment clearly demonstrates that, the entire tahsil is drought prone and faces the problem of water scarcity throughout the year. In order to make the differences again to find out the villages facing very high shortage of water. By adopting the grid operation, reclassification has been achieved and two classes have been determined. One class below '0' indicates more severity covered 566.92 km² (35.99%) area (50 villages) and 0-1 shows less severity 1008.46 km² (64.01%) area covered (93 villages).

Conclusions

It has been one of the challenging studies for quantifying the climate change impact wherein the water balance simulation modelling approach has been used to maintain the dynamics of hydrology and thereby make assessments of vulnerability which are more authentic and reliable. The average annual volume of rainfall is 1052.46 MCM. The very low rainfall volume is observed to the northern side sub basin of the tahsil (BM-61) accounts 16.43 MCM i.e. 1.56% and very high rainfall volume is observed to the eastern side sub basins of Indapur tahsil (BM-78) accounts 247.95 MCM which covers around 23.56% of the total study area. After the study of empirical formula, it is noticed that, around 49.08 % area (65 villages) facing very high water scarcity and rest of the villages (78 villages), 50.92% area comparatively show low degree of water scarcity. In an attempt to find out the present villages which are dependent on water supply through water tankers especially in summer months. This overall statistics generated from the raster analysis through the principles of map algebra, clearly indicates that entire tahsil is in water deficit zone, within which different levels of priority have been delineated.

The average annual volume of rainfall is 1052.46 MCM. The very low rainfall volume is observed to the northern side sub basin of the tahsil (BM-61) accounts 16.43 MCM i.e. 1.56% and very high rainfall volume is observed to the eastern side sub basins of Indapur tahsil (BM-78) accounts 247.95 MCM which covers around 23.56% of the total study area. The 'High' ground water potential areas are those having ground water table less than 5 m bgl, admeasures about 394.79 km² (25.06%). The 'Medium' areas are those having water table in the range of 5 to 15 m bgl this groundwater potential zone covers 553.12 km² (35.11%) of the total study area and the 'Low' ground water potential areas are those having water table

more than 15 m bgl and under these having maximum area i.e. 627.47 km² (39.83%) of the total study area.

In the study area it is observed that, the maximum 402.25 km² (25.57 %) area under more than 125 cumecs runoff and 235.51 km² (14.95%) area under less than 25 cumecs. More than 125 cumecs area patches are found at around Nimgaon Ketki and Indapur settlement. Low runoff (< 25) has estimated for Northern area, besides this it found around in patches in the middle and Eastern part. Besides this 25-50, 50-75, 75-100 and 100-125 cumecs runoff found in patches all over. The average surface water runoff of the catchment is estimated to 327.72 MCM/year.

References:

1. Arora K. R. (2007): Irrigation, Water Power And Water Resources Engineering, Standard Publishers Distributors, Delhi.
2. Balek J. (1983): Hydrology and Water Resources in Tropical Regions, ELSEVIER, Amsterdam, the Netherlands.
3. Bansil P.G. (2004): 'Water Management in India', Concept pub. Compony, New Delhi. Pp 154-155, 158, 160.
4. Biswas A. K. (1998): Water Resources: Environmental Planning, Management and Development, Tata McGraw-Hill Publishing Company Limited, New Delhi, India.
5. Central Water Commission (2005): General Guidelines for Water Audit and Water Conservation, Ministry of Water Resources, Government of India.
6. Chander S. and Prasad R. (2008): Water Resources System IIInd Edition, Jain Brothers Publication New Delhi.
7. Chitale M. A., "Maharashtra Jal Va Sinchan Aayog Ahawal", Maharashtra State (1999).
8. Dynamic Ground Water Resources of Maharashtra (2011-12), Prepared By Groundwater Surveys and Development Agency, Pune, Water Supply and Sanitation Dept., GoM and Central Ground Water Board, Central Region, Nagpur, GoI
9. Gujar R. K. and Jat B. C. (2008): Geography of Water Resources, Rawat Publications Jaipur.
10. Kaustubh Mahamuni, Siddharth Patil and Himanshu Kulkarni (2009): Rapid Hydrological Study of Nirgude and Neighbouring Villages, Indapur Taluka, Pune District, Maharashtra, Unpublished project material, Advanced Center For Water Resources Development And Management, Pune.
11. Milan K. Jermar (1987): Water Resources and Water Management, Elsevier Science a. Publishers B.V., Amsterdam, the Netherlands.
12. Raghunath H. M. (1997): Hydrology: Principles, Analysis And Design. New Age a. International (P) Limited Publishers, New Delhi, India.
13. Sharma J. R. (2014):, Krishna Basin, Central Water Commission, Ministry of Water Resources, Government of India, New Delhi (2014).
14. Shwetpatrica Volume 2 (2012): Irrigation Development and Feature Progress in a. State, Ministry of Irrigation, Mumbai, Maharashtra.
15. Subhan Khan and Rohan Ali.S, (2002): Water resource Assessment and management using GIs and Remote sensing in parts of Haryana and Rajasthan", Geospatial Today (May-June 2002), (P. 53-54).
16. Suresh R. (2008): Watershed Hydrology, Standard Publishers Distributors, Delhi.
a. Thornthwaite, C. W.: An approach toward a rational classification of climate, Geogr. Rev., 38, 55-94, 1948.
17. W. W. Immerzeel, A. Gaur, P. Droogers (2006): Remote Sensing and hydrological modeling of the Upper Bhima catchment, International Water Management Institute, General Foulkeswege, Wageningen.
18. www.cgwb.gov.in
19. www.csis.es
20. www.pune.gov.in